


## 1 - Wiring Accessories





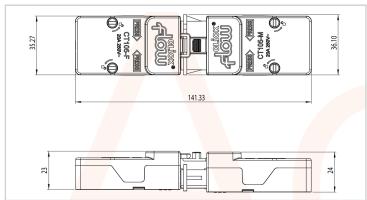

| Technical Specification |                                       |
|-------------------------|---------------------------------------|
| Male Dimensions         | 79mm (W) x 36mm (D) x 24mm (H)        |
| Female Dimensions       | 79mm (W) x 36mm (D) x 23mm (H)        |
| Maximum Voltage         | 250V~ 50Hz                            |
| Load Rating             | 20A                                   |
| Terminal Conductor Size | 2.5mm <sup>2</sup> Max. Solid or Flex |
| Cable Restraint         | Yes                                   |
| Operational Temp.       | -5°C to +40°C                         |
| Warranty                | 10 Years                              |
|                         |                                       |
|                         |                                       |
|                         |                                       |
|                         |                                       |
|                         |                                       |
|                         |                                       |
|                         |                                       |

## AC12313

## **3 Pole Connector**

- 20A rated
- 3 pole connector
- Male and female connectors supplied
- Push-in terminals
- Locking mechanism integrated
- Quick fit covers
- Fast fit cable restraints

1-AC12313-2021-V1

