

AC21000

U-Clip for fitment in size 2 Mini Trunkings

Ideal for ceiling voids, or popular PVC trunking

Certified for 2 hours at 970°C


Compliant with BS7671 and BS5839-1 requirements

Thumb friendly, easy fold side-tabs

Rounded edges for easy handling

Pliable gauge

Supplied in bags of 100 pcs

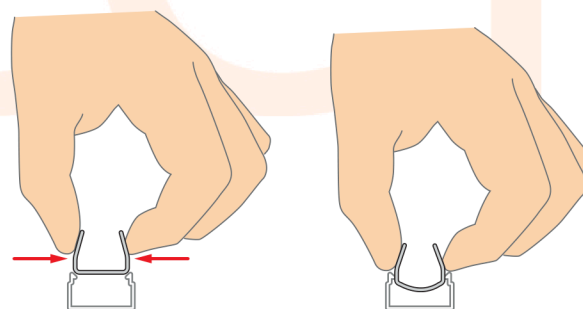

When inserting U-Clip 30 in 25x16mm trunkings, gently squeezing the upright tabs causes the base to compress for tight fitment in Size 2 trunkings.

Technical Specification

Produced from high temperature pre-galvanised mild steel

(L) 20mm x (W) 23mm x (H) 8mm (folded)

5.7mm diameter hole

U-shaped design

Fold over rounded tabs

Compliant with BS7671 & BS5839-1 requirements

Pre-drilled hole in base for fixings

Fire-tested by Exova

2-AC21000-2021-V1