



### AC21068

#### 60mm long fire rated screws

Torx 30 head

60mm long shaft

Insert into 5mm pilot hole

Ideal for securing wall mounted screens & consumer units etc.


Fire rated, 1200°C melting point

Can be used in masonry, plasterboard / breeze-block, concrete, brickwork & wood

No need for plastic wall plugs

Non-corrosive finish

Excellent tensile strength, shear strength and pull-out load performance

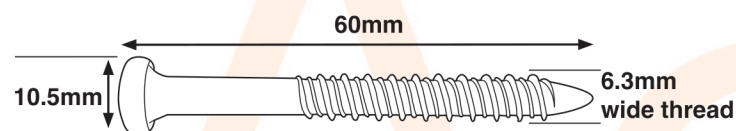

#### Technical Specification

Produced from high temperature carbon steel, ruspert silver coating

(L) 60mm x (W1) 10.5mm head width x (W2) 6.3mm thread width

Compliant with BS7671 & BS5839-1 requirements

1000 hour salt spray tested

Secure, high torque; torx 30 head

5mm pilot hole required

2-AC21027-2021-V1