




### AC3200

### 20A 4 Pole Enclosed Switch-Disconnecter (IP65)

IP65, 20mm cable entries, Robust polycarbonate enclosure, UV resistant, Enclosure glow wire flammability rating 960°C, Halogen free, Lower smoke generation, Padlockable in the OFF position, AC-21 Switch Rating, H:125 x W:100 x D:74mm, Enhanced safety, Easy Installation, Robust & Durable, Wide product range

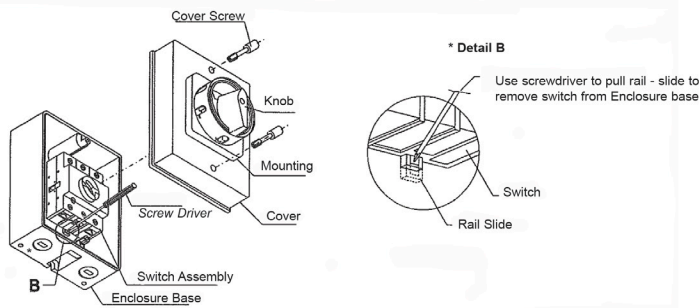

#### Technical Specification

|                                      |   |
|--------------------------------------|---|
| IEC & EN                             | 690V  |
| Main Switch: Isolating Voltage up to | 750V  |
| Rated Impulse Withstand Voltage Uimp | 6kV   |
| Rated Uninterrupted Current Iu       | 16A   |
| Max Fuse Size (Type gL)              | 20A   |
| Rated Fused Short Circuit Current    | 5kA   |
| Single/ Multiple Strand Wire         | 2.5mm <sup>2</sup> Min<br>10mm <sup>2</sup> Max |
| Fine Strand with Sleeve              | 0.75mm <sup>2</sup> Min<br>6mm <sup>2</sup> Max |
| Recommended Tightening Torque        | 1.7Nm   |
|                                      |   |
|                                      |   |
|                                      |   |
|                                      |   |

3-AC3200-2021-V1