


3 - Circuit Protection & Industrial Control



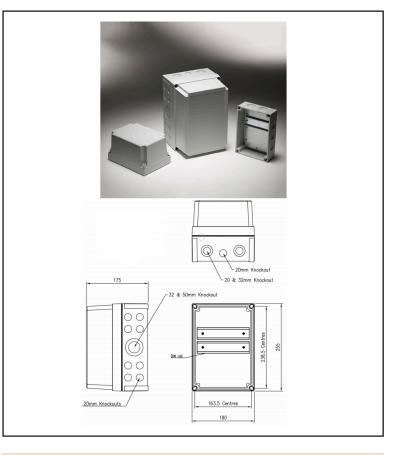

AC3254

MNX Polycarbonate Contactor Enclosures For 40-65A

IP67 / IK08, H: 255 x W: 180 x D: 175mm, Flammability rating UL94-5V, Temp range: -40°C to +120°C (Short term) / -40°C to +80°C (Long term), Pre-fitted back plate & din rail

Polycarbonate
RAL 7035
Polyurethane
IP66/67
IK08
UL508
Halogen Free

3-AC3254-2021-V1

