




### AC3297

### 63A, 30mA, Type A 4 Pole RCCB 10kA

EN 61008, 380-415V, Type A, Easy to  
Install, time saving, enhanced safety

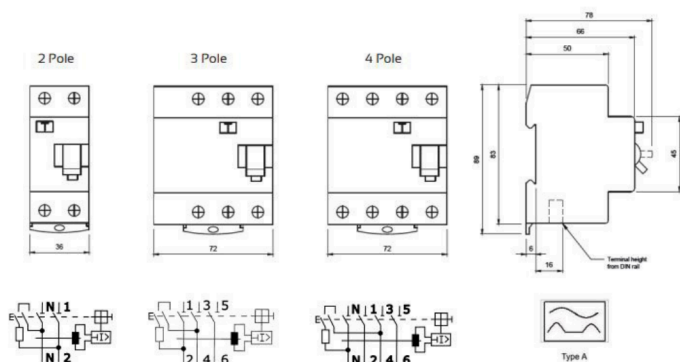

#### Technical Specification

Standards	BS EN 61008, EN 61008
Declaration and Approval	UKCA, CE & SEMKO* *not including 3 Pole & 110V RCCBs
Rated Current (In)	25 / 40 / 63 / 80 / 100A
Standard Tripping Time 1 x IΔn	≤ 300ms
Standard Tripping Time 5 x IΔn	≤ 40ms
Rated Voltage (Ue)	AC 110/230(240)/400(415)V
Rated Frequency	50/60Hz
Rated impulse withstand Voltage (Uimp)	4kV
Rated Short-Circuit Capacity (Inc)	10kA
Pollution Degree	2
Terminal Protection	IP20
Mounting	35mm DIN Rai
Terminal Type	Tunnel
Recommended Terminal Torque	2.0Nm

3-AC3297-2021-V1