


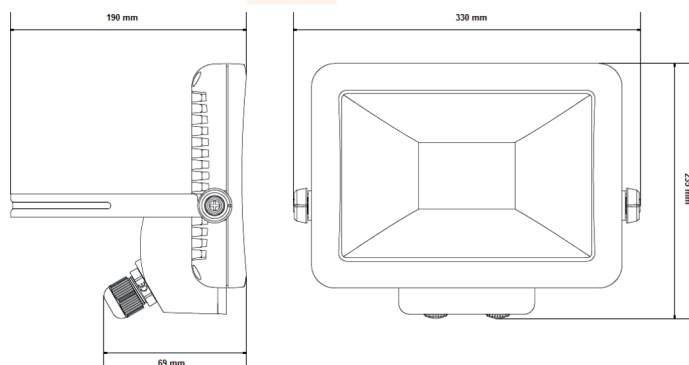

AC444743

50W Professional Rewireable LED Floodlight

Fully polycarbonate front lens for enhanced light control, ideal for food preparation areas and grain stores.

Plug & Play PIR or Photocell option with linkable control (optional extra).

Easy install bracket – enables floodlight fixing screws to be pre-fitted.

Durable powder coated finish.

IP65 weatherproof rating.

Adjustable mounting bracket with hook feature to enable easy assembly.

Driverless ACLED technology.

Rewireable with easy access screw terminals with link terminal for common accessories control.

Technical Specification

Operating Voltage: 230V AC 50Hz

Installation Type: Bracket Mounted

Earth Class Rating: Class I

Operating Temperature: -20°C to 40°C

Ingress Protection Rating: IP65

Wattage: 50

Beam Angle: 115° x 115°

Pan & Tilt Adjustment: 360° Tilt (Without Attached PIR/Photocell)

Energy Efficiency: Class F

Energy Usage: 50KwH/1000H

Lumen Output: 5300

Colour Temperature: 4000K

Mounting Hole Centres: 260mm

AC444743 - 2021 - V1

