


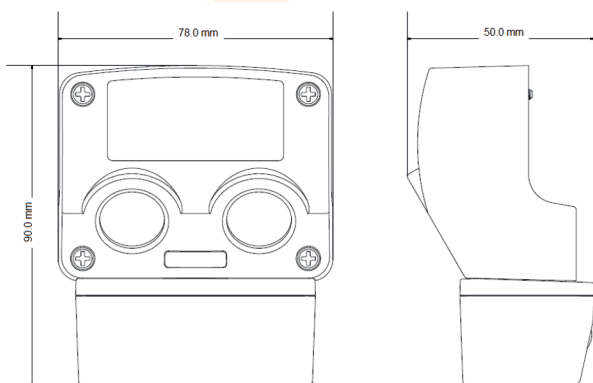

AC444751

Dedicated Photocell For LEDPRO Floodlights

Dedicated Photocell for use with Timeguard LEDPRO Floodlights.

Fits ALL Timeguard LEDPRO Floodlights.

Installer friendly captive terminal cover screws.

Simply replaces the terminal cover and plugs in to the LEDPRO floodlight – no extra cabling necessary.

Timed on duration or continuous Dusk to Dawn (adjustable).

Adjustable Lux setting.

Technical Specification

Operating Voltage:	230V AC 50Hz
Installation Type:	LEDPRO Clip In Module
Earth Class Rating:	Class I
Operating Temperature:	-20°C to 40°C
Ingress Protection Rating:	IP55
Switch Rating:	250W LED, 1000W Halogen, 200W CFL, 500W Fluorescent
	Tube W/O PF Correction
ON Time Adjustment:	2, 4, 6, 8 Hours or Dusk Till Dawn
Lux Level:	2 to 1000

AC444751 - 2021 - V1

