



AC444791

Wi-Fi PIR Sensor With Direct / Indirect Switching

Adjustable time delay settings in app or offline.



LUX (light level) adjustment – Day to Night Manual ON/OFF switching override.

IP55 weatherproof rating.

Simple and quick to fit terminal block connectors.

Continues to work offline with loss of a Wi-Fi connection.

Learn option for custom lux level activation

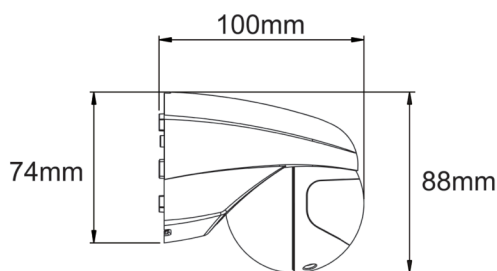

Technical Specification	
Operating Voltage:	230V AC 50Hz
Installation Type:	Surface
Earth Class Rating:	Class II
Operating Temperature:	0°C to 40°C
Ingress Protection Rating:	IP55
Max Mounting Height:	2.5m
Detection Angle:	140°
Detection Range:	12m Motion
Switch Rating:	250W LED, 500W Fluorescent, 1000W Halogen
Lux Level:	10 to 2000
ON Time Adjustment:	30 Seconds to 30 Minutes
Standby Consumption:	<1W
Program Modes:	Scenes (Time Control, Dusk / Dawn), Presence & Absence

AC444791 - 2023 - V1

