



### AC444798

### 360° Flush Ceiling Detector - Single Channel

Switches lights ON when presence and motion is detected in combination with light levels.


Enhanced 360° detection zone for optimum coverage.

Ideal for energy saving installations in the workplace, corridors, offices, toilets etc.

Units Can Be Wired In Parallel up to 8 units, (Not Exceeding Total Load).

IP44 Environmental Rating (Internal Use Only).

Permanant On Facility, (Pulse Override).

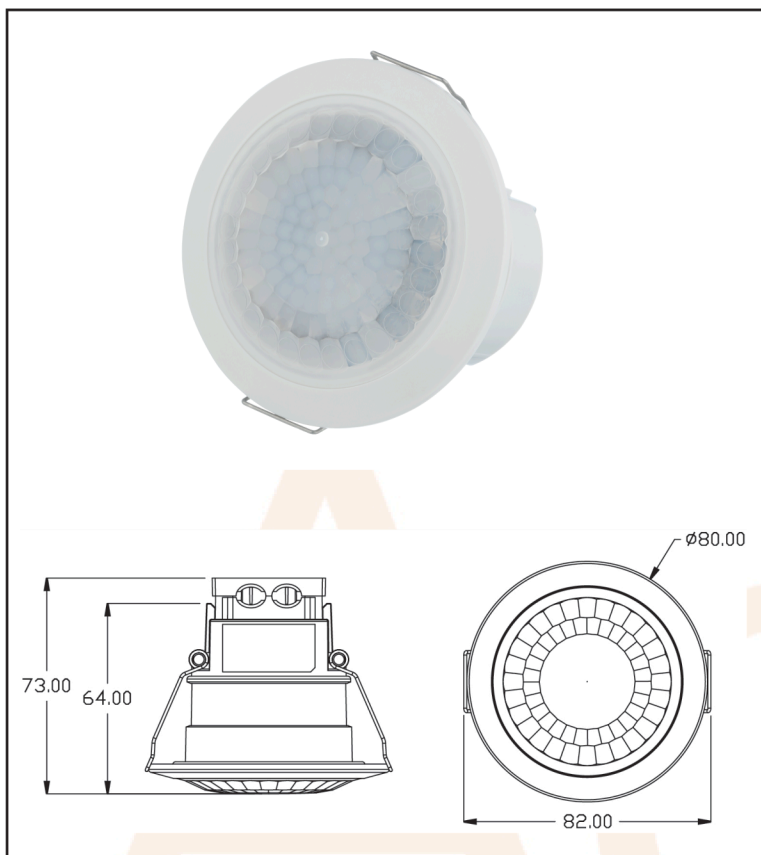

Technical Specification	
Operating Voltage:	230V AC 50Hz
Installation Type:	Flush
Earth Class Rating:	Class II
Operating Temperature:	-20°C to 40°C
Ingress Protection Rating:	IP44
Max Mounting Height:	3m
Detection Angle:	360°
Detection Range:	6m Presence, 12m Motion
Switch Rating:	600W LED, 600W Fluorescent, 2000W Halogen or 250W Fan
Lux Level:	2 to 2000
ON Time Adjustment:	1 Minute to 30 Minutes
PIR Sensitivity	Yes (Distance)

AC444798 - 2023 - V1