




AC447156

38W LED panel, IP20, 4000K

- Suitable for use in offices, shops, reception areas, restaurants, hotels, schools, hospitals
- TP(b) rated diffuser in accordance with BS2782.0:2011 Method 508A
- LED replacement for 2x36W T8 lay-in modular
- 50,000 hour average lamp life. Up to 5 times that of a standard fluorescent lamp
- Fits into standard sizes of ceiling grid - 15mm and 24mm
- High efficacy of 100lm/W
- Wide operating ambient temperature range of -20°C to +40°C
- Suspension kit available (RAMSUS-3W)
- Suitable for switching by PIR, Microwave or Photocell
- 1-10V and DALI dimmable driver options available

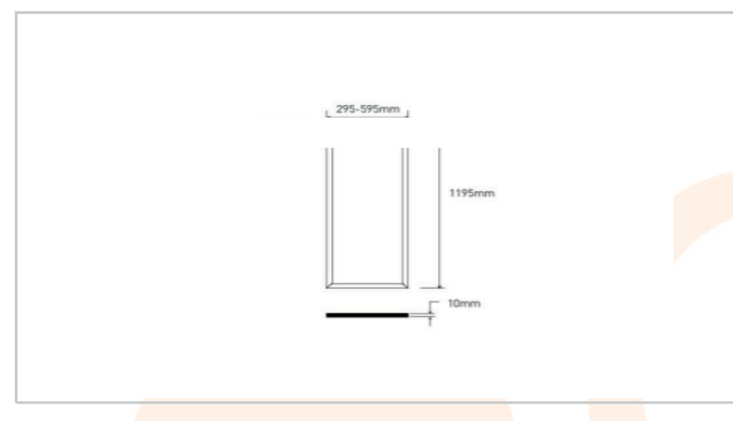

Technical Specification

Cap Type	LED
Total Power	37.5
Lumens (lm)	3730
Beam Angle	110
Lamp Life (Hrs)	50000
Number of LEDs	196 (14S14P)
Comparable To	2x36W T8 fluorescent
CRI	80
CCT (K)	4000
Efficacy (lm/cctW)	100
Lux at 1m	1290
Power Factor	0.97
Colour	White
Width (mm)	295
Depth (mm)	10

4-AC447156-2021-V1

