




AC447252

60W LED Batten, IP20, 1.5m

- Suitable for use in flats and apartment blocks, public buildings, care homes, communal areas, reception areas
- LED replacement for 2x58W T8 fluorescent surface fittings
- Low profile aluminium housing with polycarbonate end caps and diffuser
- CCT selectable via 3 way switch under the end cap enabling switching between 3000K, 4500K and 6500K
- Large screw terminal block allowing max 2.5mm² conductors
- High efficacy of 112-129lm/W
- Wide operating ambient temperature range of -20°C to +40°C
- Suitable for switching by PIR, Microwave or Photocell

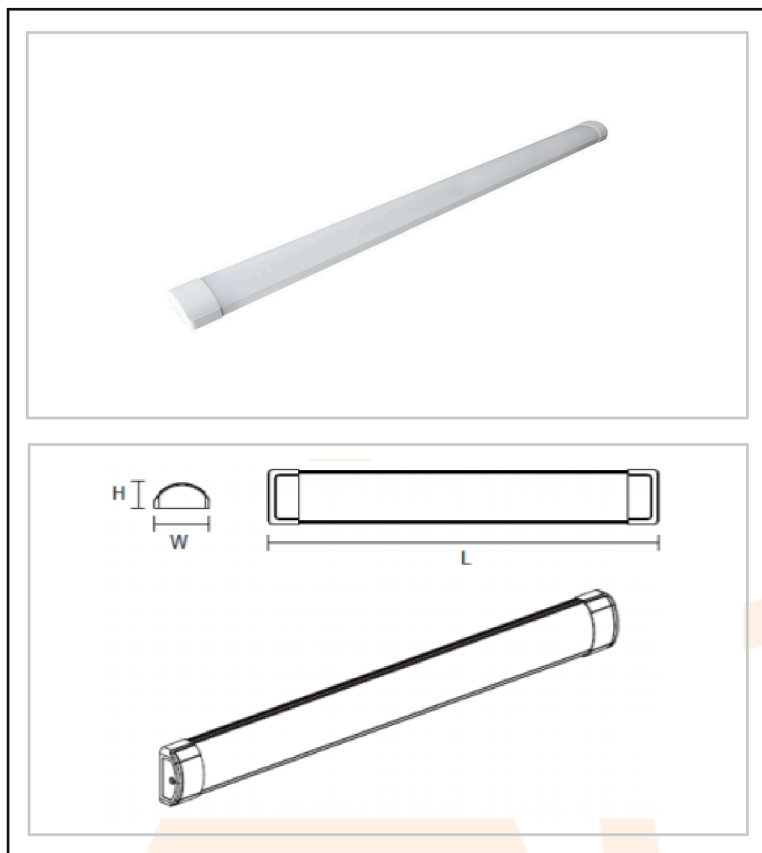

Technical Specification	
Cap Type	LED
Total Power	52.5/50.6/52.1
Lumens (lm)	5910/6530/6290
Beam Angle	120
Lamp Life (Hrs)	30000
Number of LEDs	600 (2x 25S12P)
Comparable To	2x58W T8 fluorescent
CRI	80
CCT (K)	3000/4500/6500
Efficacy (lm/cctW)	112/129/121
Lux at 1m	1690/1860/1800
Power Factor	0.9
Height (mm)	40
Width (mm)	85
Length (mm)	1500

4-AC447252-2021-V1