



AC4909

SS14-R Two part photocell

Dusk to dawn switching for safety & security
Photocell miniature for lanterns with limited space using a remote head for added flexibility
Often installed within a weatherproof box for switching of bulk and decorative lighting

LED Compatible


Highly accurate switching to ensure lights on when needed and off when not to save energy

Easy to install

Maintenance free

Manufacturer with 60 years experience and industry leader

Also available - One part miniature photocell - AC4908

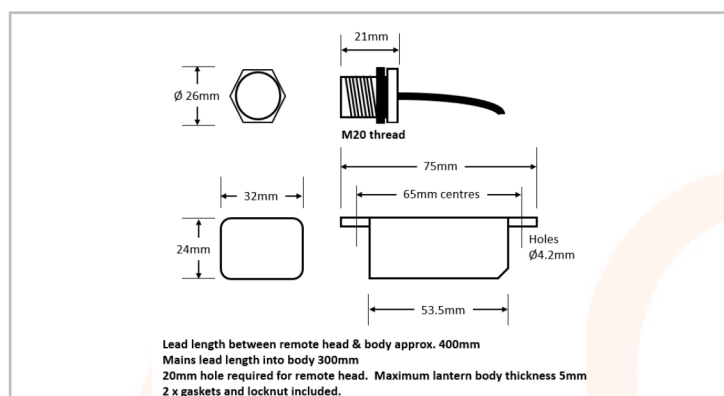

Technical Specification

Fixing	20mm sensor head with remote body
Construction Material	Polycarbonate Enclosure (UV Stabilised)
Sensor Type	Photodiode
Switching technology	Electro-Magnetic Relay
Switch on level	When daylight lowers to 70 lux
Switch off level	When daylight reaches 105 lux
Switching ratio	Positive
Maximum load levels	LED 250 Watts
	Discharge Lighting (e.g. HPS, MH) 500 Watts
	Incandescent Lighting 1200 Watts
Supply voltage	198-264 Volts
Frequency	47-63Hz
Power Consumption	<0.5 Watts
Operating temperature	-20 degrees to +75 degrees Celcius
Ingress protection	IP65 when installed correctly

4-AC4909-2021-V1