


4 - Lamps and Lighting





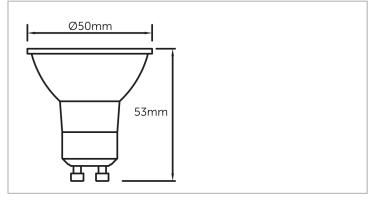

| Technical Specification | | | | | |
|---|---|--|--|--|--|
| Power | 3.1W | | | | |
| Сар | GU10 | | | | |
| Lumens | 350 | | | | |
| Candela | 650 | | | | |
| Energy Savings | Savings 94% | | | | |
| Colour Temp | olour Temp 4000K | | | | |
| Beam Angle | 38° | | | | |
| Dimmable | immable Yes | | | | |
| Life | 20000 Hours | | | | |
| CRI 85 - Exceeds EU standard of Ra 80 for Colour Rendering Index | | | | | |
| LMR | 80 - Exceeds EU standard of 70 for Lumens Maintenance Ratio | | | | |
| | | | | | |
| | | | | | |
| ¹ Exceeds EU standard of 70 for Lumens Maintenance Ratio ² Exceeds EU standard of RA 80 for Colour Rendering Index ³ Subject to terms & conditions | | | | | |

AC49507

LED Halo Glass GU10 Dimmable

The Halo Glass combines the retro feel of halogen lamps with the efficiency of LED technology. The high-grade driver within the Halo Glass allows for smooth dimming at minimum and maximum load levels. The precision moulded polycarbonate lens ensures precise beam angle light distribution.

- True fit GU10 size
- Suitable for fire rated and IP rated fixtures
- 38° beam angle
- High grade driver designed for smooth dimming at min & max load levels, operating effectively with rotary and digital dimming systems

| Code | CCT (K) | Lumens | Description |
|---------|---------|--------|---|
| AC49507 | 4000 | 350 | 3.1W LED Halo Glass GU10 Dimmable - 4000K 38° Beam Angle |







4_AC49507_2022_V1

