



AC5834

Optical smoke alarm


Optical sensor - quick response to slow smouldering fires

10 year Lithium battery powered

RadioLINK Wireless interconnection

Built in AudioLINK data extraction technology

Kitemarked to BS EN14604:2005

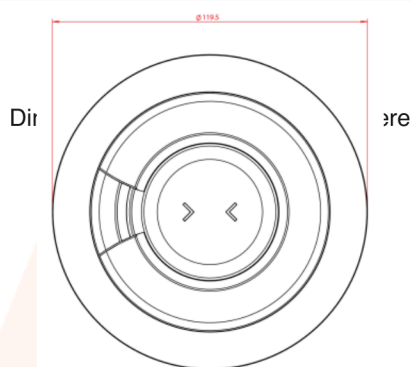

Technical Specification

Sensor type	Optical - with dust compensation
RF Range	>100 in free air
Battery Type	Lithium primary
Depth(mm)	55
Width(mm)	120
Packaged weight(kg)	0.266
Humidity Range	15 - 95
RF Frequency	868.499
Technologies	AudioLINK/RadioLINK+
Height(mm)	125
Product Weight(kg)	0.21
Temperature range	-10 to 40

5-AC5834-2022-V1