


1 - Wiring Accessories



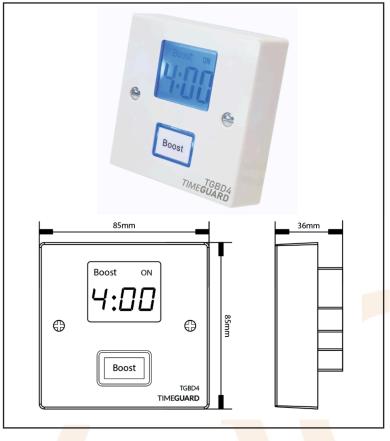

AC6434

4 Hour Digital Boost Timer

4 Hour maximum time on set in 30 minute increments.

Boost button with backlight disable feature.

| Technica <mark>l Spec</mark> ification | |
|--|---|
| Operating Voltage: | 230V AC 50Hz |
| Installtion Type: | Surface |
| Earth Class Rating: | Class II |
| Operating Temperature: | 0° to 45°C |
| IP Rating: | IP20 |
| Back Box Minimum Depth: | 25mm |
| Switch Type: | Single Pole |
| Switch Rating: | 13A Resistive, 200W LED, 1000W Halogen, |
| | 500W Fluorescent, 100W CFL |
| Time Delay Range: | 30 Minutes to 4 Hours (With 30 Minute Increments) |
| | |
| | |
| | |
| | |
| | |

AC6434 - 2021 - V1

