


## 1 - Wiring Accessories



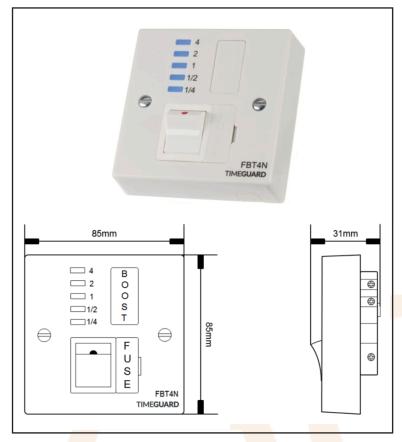

Technica <mark>l Spec</mark> ification	
Operatin <mark>g Volt</mark> age:	230V AC 50Hz
Installtion Type:	Flush Wall Box / Surface Mount Patress Box
Earth Class Rating:	Class II
Operating Temperature:	0° to 40°C
IP Rating:	IP20
Back Box Depth	25mm
Switch Type:	Single Pole
Switch Rating:	13A Resistive, 200W LED, 1000W Halogen,
	500W Fluorescent, 100W CFL
Time Delay Range:	15 Minutes, 30 Minutes, 1 Hour, 2 Hours, 4 Hours

## **AC6439**

## **4 Hour Electronic Boost Timer**

Automatic timer countdown selection for up to 4 hours.

Ideal for immersion heaters, room heaters, towel rails and lighting.

Replaces existing single gang connection unit or fixed appliance outlets.

Easy push button selection with clear LED output status.

Provides timed output protected by a BS1362 fuse switch.

Fits a standard flush or surface mount BS wall box min 25mm

AC6439 - 2021 - V1

