




## 6 - Ventilation & Heating

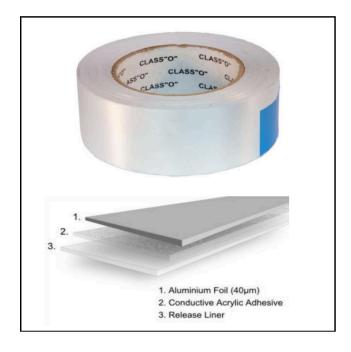

## AC66218

## 20m x 40mm Aluminium Conductive Tape

Conductive single coated acrylic adhesive tape for use with Combymat for laminate.

When used together with the Combymat for laminate, it will ensure complete earth protection across the full area of the heating mat and prevent uneven heating over the floor.

Technical Specification	
Dimensions	20m x 40mm
Total Thickness	85μm ±5
Material	Aluminium Foil (40μm)
Peel Strength	295 g/cm
Electrical Resistance	$10^{-1} \sim 10^{-3}$ ohms/cm
Manufactured In	Korea (South)

- Used to provide complete earth shielding on foil based underfloor heating
- Creates a heat bridge between heating mat runs to spread heat evenly

6-AC66218-2021-V1

