




### AC7312

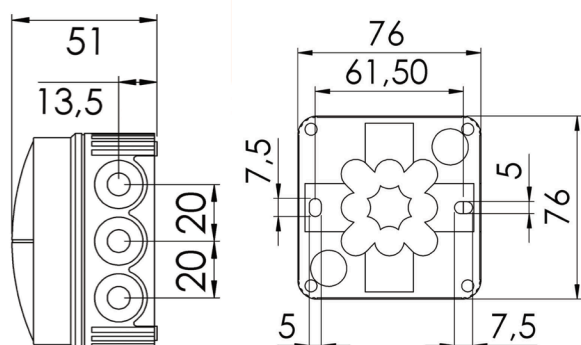

| Technical Specification      |                            |
|------------------------------|----------------------------|
| Material cable gland         | Polypropylene              |
| Temp. range min              | -30 °C                     |
| Temp. range max              | 100 °C                     |
| Temperatures during install. | -5 °C - 60 °C              |
| Protection class             | IP66                       |
| Glow wire test               | 750 °C                     |
| Voltage                      | 400 V                      |
| Rated current / A (Terminal) | 24 A                       |
| Terminals/poles              | 5-pole, 2,5mm <sup>2</sup> |
| Fixing                       | 2 internal openings        |
| Ø cable diameter min         | 3 mm                       |
| Ø cable diameter max         | 14 mm                      |
| External dimensions LxWxH    | 76 x 76 x 51mm             |
| Product Color                | Black - RAL 9005           |
| Packing unit                 | 10                         |

2-AC7312-2021-V1