


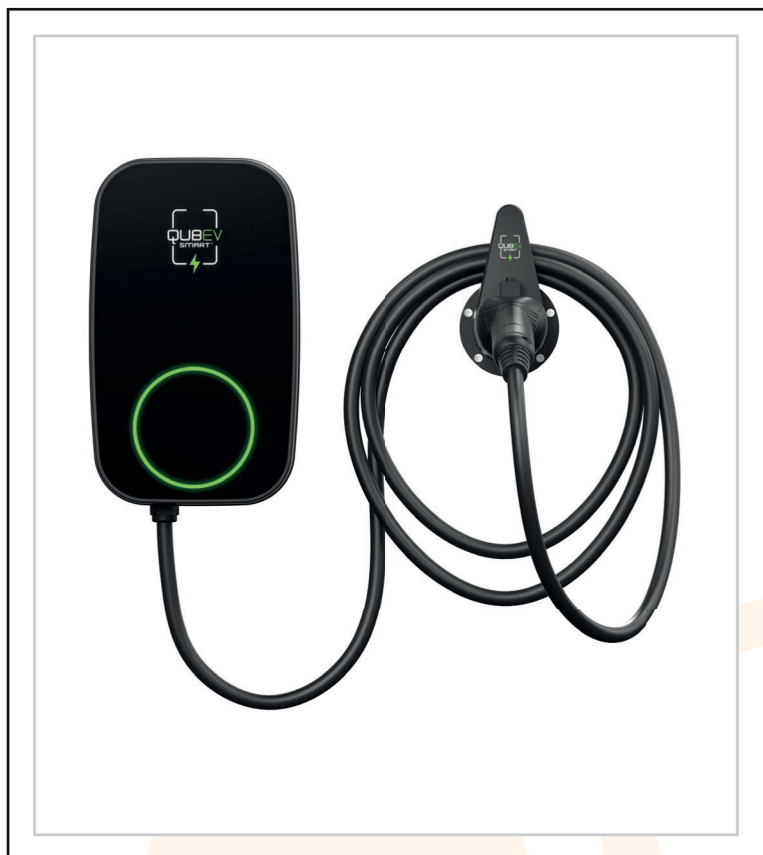

### AC92508

### EV charger 22kw T2 5m Lead

1x up to 22kW Type 2 Tethered Lead can be downrated via phone App

For domestic & workplace installations

PEN fault & residual current protection (AC 30mA Type A, DC 6mA)

Dynamic load balancing (CT clamps & cables included)

Free charging App for Android and Apple phones enables scheduled charging, guest charging and free-to-use options, plus views of usage data

UK Smart Charge Point Regulations compliant

#### Technical Specification

| Attribute                   | Value                               |
|-----------------------------|-------------------------------------|
| Charging Cable              | Tethered 1x 5m with Type 2 Plug     |
| Power Output                | Up to 22W                           |
| Power Input                 | 400V, 50/60Hz Three Phase           |
| Colour                      | Black                               |
| Dynamic Load Balancing      | Yes                                 |
| PEN Fault Protection        | Yes                                 |
| Residual Current Protection | Yes                                 |
| Control                     | Free online phone App               |
|                             | Meets all currently req'd standards |
|                             | including EN 61851-1                |
| Compliance                  | UK Smart Charge Point Regulations   |
|                             | CE and UKCA                         |
|                             |                                     |
|                             |                                     |

9-AC92508-2023-V1