


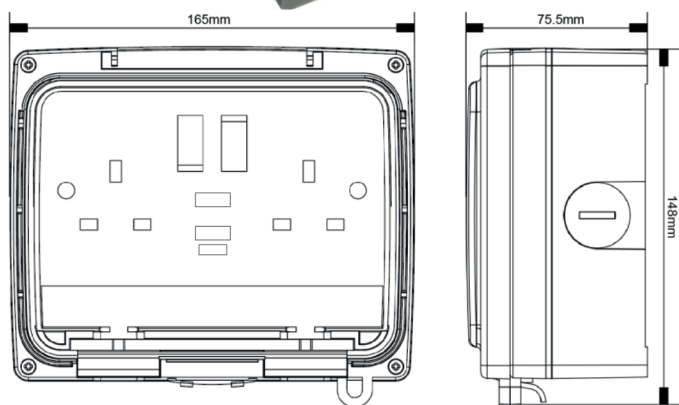

### AC1735

#### IP66 Twin Gang 13A Switched RCD Socket - Passive

Weathersafe Vision see through clear plastic cover.

Dual Flag Technology provides added protection against the risks of electrocution.

Automatically disconnects both Live and Neutral connections leaving Earth connection intact.

Contacts remain latched when power supply is temporarily lost.

Meets latest IET wiring regulations.

Fully enclosed IP66 protective housing.

Impact resistant housing with lockable cover facility & easy release lid catch.

Multiple M20 threaded screw outs

| Technical Specification  |                                            |
|--------------------------|--------------------------------------------|
| Operating Voltage:       | 230V AC 50Hz                               |
| Installation Type:       | Surface                                    |
| Earth Class Rating:      | Class I                                    |
| Operating Temperature:   | -5° to 55°C                                |
| IP Rating:               | IP66                                       |
| Socket Outlet:           | Twin Gang 13A BS Plug                      |
| Switch Type:             | Single Pole (Switched Socket)              |
| Classification Type:     | IEC 60755                                  |
| Rated Trip Current:      | 30mA                                       |
| Breaking Capacity:       | 250A (Earth Leakage)                       |
| Trip Speed:              | Less than 40msec at 150mA residual current |
| Through Fault Withstand: | 1500A                                      |
| Altitude:                | <2000m                                     |
| Mounting Hole Centres:   | 120mm Top/Bottom, 120mm Left/Right         |

AC1735 - 2021 - V1